


SERIE MVRB

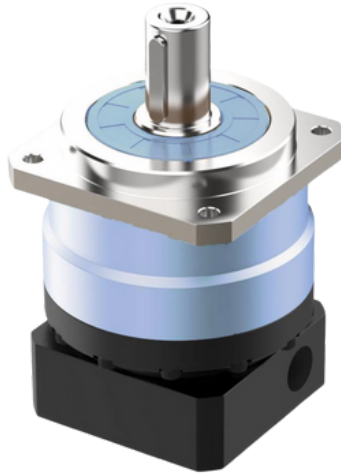

Taglia	42, 60, 90, 115, 140, 180, 220	
Rapporti S1	Nm	3 4 5 6 7 8 10
Rapporti S2	Nm	15 20 25 30 35 40 50 60 70 80 90 100
Gioco angolare S1	arc min	$P0 \leq 1.5 / P1 \leq 3 / P2 \leq 12$
Gioco angolare S2	arc min	$P0 \leq 3 / P1 \leq 5 / P2 \leq 8$
Rumore	db	$\leq 56-70$

Taglia	Forza radiale ammissibile	Forza assiale ammissibile	Rigidità torsionale
	N	N	Nm/arcmin
42	780	390	3
60	1530	765	7
90	3250	1625	14
115	6700	3350	25
140	9400	4700	50
180	14500	7250	145
220	20000	10000	225