


SERIE MVRBR

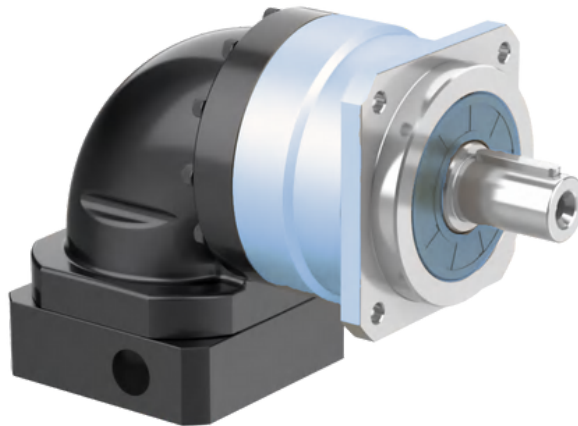

Taglia	60, 90, 115, 140, 180, 220	
Rapporti S1	Nm	3, 4, 5, 6, 7, 8, 10, 12, 14, 20
Rapporti S2	Nm	15, 25, 30, 35, 40, 50, 60, 70, 80, 100, 120, 140, 160, 200
Gioco angolare S1	arc min	P1 ≤5 / P2 ≤7
Gioco angolare S2	arc min	P1 ≤7 / P2 ≤10
Rumore	db	≤63-72

Taglia	Forza radiale ammissibile	Forza assiale ammissibile	Rigidità torsionale
	N	N	Nm/arcmin
60	1530	765	7
90	3250	1625	14
115	6700	3350	25
140	9400	4700	50
180	14500	7250	145
220	-	-	-